



## BUCKLING of STRUTS HST45



Year 2  
study

### Features

- Four test specimens, spring steel, four different lengths
- Force and Deflection connect to HDA200 Interface.
- Dial Gauge can traverse specimen length
- Specimen shape mapping
- Specimens can be loaded off-centre.
- Dedicated e-book supplied

### Description

Spring steel specimen struts are supported between two precision chucks; one in the top and one within the screwjack loading mechanism. Attached to the end of the struts are blocks with equi-spaced 'V' grooves in the end face. A variety of end conditions can be created by either clamping the blocks directly into the chucks, or installing knife-edge blocks into the chucks. End conditions include pinned/pinned, fixed/pinned or fixed/fixed.

The struts are compressed using the loading mechanism supplied. As the strut starts to deform, the amount of deflection is recorded using a dial gauge. The dial gauge can be moved up and down the strut length so that the deflection can be seen at various points. Both the load cell output and dial gauge output must be fed directly into the HDA200 Interface (sold separately).

### Related laws

- Euler's Theory.
- Euler's Buckling Load.
- Buckling Load against End conditions and Strut Length.

### Learning capabilities

- Euler's theory
- Varying end conditions against Euler's buckling load
- Varying strut length against Euler's buckling load

- Off-centre Strut loading

## Technical Specification

- Strut lengths: 350, 400, 450, 500mm
- Strut section: 25(W) x 1.70(H) mm
- Loading Mechanism: 0...500N
- Digital Dial Gauge: 12.7mm travel; 0.01mm resolution

## Essential Ancillaries

- HST1 (or HST100)
- HDA200


## What's in the Box?

- 4 x Specimens
- 1 x Back Support
- 1 x Loading Mechanism
- 2 x Knife Edges
- 1 x Digital Dial Gauge and Data Cable
- 1 x Dial Gauge Stand
- 1 x Tape measure
- Accessories container
- 2 x Hex wrench
- Instruction manual
- Software
- E-book
- Packing list
- Test sheet

## You might also like

- HSM15
- HSM10
- HST12

## Supporting Software

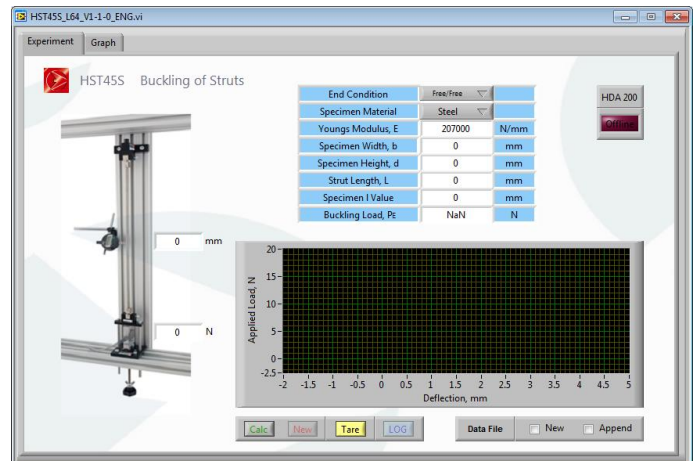

- HST45S

## Minimum System Requirements

- Computer or Laptop running WIN7 or above

## Weights & Dimensions

- Weight: 8 kg
- Length: 840mm
- Width: 120mm
- Height: 40mm

## Essential Services

- 110/120V, 60Hz or 220/240V, 50Hz, single phase, live neutral and earth for HDA200

## Operational Conditions

- Storage temperature: -10°C to +70°C
- Operating temperature range: +10°C to +50°C
- Operating relative humidity range: 0 to 95%, non condensing

## Ordering information

To order this product, please call PA Hilton quoting the following code:  
HST45

All brand and/or product names are trademarks of their respective owners. Specifications and external appearance are subject to change without notice. The colour of the actual product may vary from the colour shown in the brochure.

Copyright © 2018 P.A. Hilton Limited. All rights reserved. This technical leaflet, its contents and/or layout may not be modified and/or adapted, copied in part or in whole and/or incorporated into other works without the prior written permission of P. A. Hilton Limited. Hi-Tech Education is a registered trade mark of P. A. Hilton Limited.

COUNTRY OF ORIGIN - UK WARRANTY PERIOD - 2 YEARS